



ALERTING DRIVERS WITH SIGHT, SOUND, AND SENSATION AWARENESS

The TraFFix Alert High Speed Rumble Strip provides increased driver awareness of upcoming changes in road conditions with sight, sound, and sensation. Safe for low and high speed roads as well as all vehicle types, including motorcycles.



01 MAGNA-LOK JIGSAW CONNECTION

Magnetic Jigsaw Connection keeps halves securely connected. Add other selling point of magnetic connection here for more info.



Designed for High Speed Roadways



Safe with Motorcycles



Performs in Dry and Wet Conditions

- Insignificant movement at high speeds
- Highly visible on concrete and asphalt
- Designed for roadways with speed limits up to 70MPH/113KPH
- Complies with 2009 MUTCD 6F.87
- Provides increased driver attention by alerting drivers using sight, sound & sensational awareness
- TraFFix Alert High Speed is especially targeted at drivers who are inattentive, fatigued or distracted
- 12" wide x 3/4" tall x 66" long sections link via MAGNA-LOK Magnetic Jigsaw Connection
- Two connected 66" sections cover an entire lane width of 11' (132") and conforms to road surface
- Two person, easy install operation



84075-HS-B
Alert High Speed Rumble Strip

TRAFFIX ALERT® HIGH SPEED RUMBLE STRIP SPECIFICATION


Portable rumble strip made of pressure cast steel and cast aluminum segments, tapered on leading and trailing edges, with a high traction urethane treaded bottom surface. The segments are linked with marine grade galvanized wire rope and stainless steel spacers. The spacers between the segments will be stainless steel. Each Section will be 5.5 feet long, (1.7 meters) and will have a Magnetic Jigsaw Connection on one end so that two sections can be connected to create a Strip, 11 feet long (3.4 meters). One Strip will cover an 11 foot lane width. The aluminum and steel segments will have a textured surface to maximize gripion.

Each section will weigh approximately 75 lbs, (34 kg) and include a handle segment at each end for manual carry and deployment. Each strip will weigh approximately 150 lbs, (68 kg). Height of the rumble strip is not to exceed 3/4", (19 millimeters). Width of the rumble strip is 12.5", (0.3 meters).

Three Strips will be used to create an array, (set) of rumble strips to be laid on the roadway prior to the work zone to alert distracted drivers to the upcoming construction work zone or change in traffic conditions. The placement and spacing of arrays, (sets) is determined by the local road authorities.


STRIP [84150-HS-B]

Weight: Approx. 150 lbs. [68 kg]



SECTION [84075-HS-B]

Weight: Approx. 75 lbs. [34 kg]

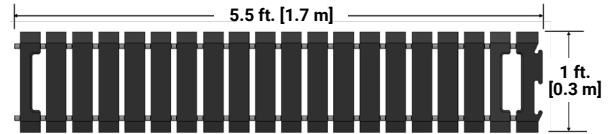

SPECS: SECTION

WEIGHT:	75 lbs. / 34 kg
HEIGHT:	0.75 in. / 0.02 m
LENGTH:	5.5 ft. / 1.7 m
WIDTH:	12 in. / 0.3 m
SEGMENTS:	20

SPECS: STRIP

WEIGHT:	150 lbs. / 68 kg
HEIGHT:	0.75 in. / 0.02 m
LENGTH:	11 ft. / 3.4 m
WIDTH:	12 in. / 0.3 m
SEGMENTS:	40

MATERIALS: textured steel, textured aluminum, urethane, stainless steel, galvanized rope cable



02

MOTORCYCLE SAFE

Safe for use with motorcycles



03

EASY IMPLEMENTATION + STRONG CONNECTION

Easy grip handle makes positioning strips simple. Magnetic jigsaw connection locks firmly in place, keeping strips securely connected.