

**TraFFix  
Devices Inc.**



**ENVIRO-CONE™**



*Made in the USA means a reliable, consistent and sustainable source of supply for distributors and users throughout North America.*

PRODUCT BULLETIN

**Recyclable**


- The Enviro-Cone™ is 80% recycled by weight and can be recycled again. No more land fills loaded with toxic PVC cones. Enviro-Cone also qualifies for Green Points due to its high recycled content.
- If ever a stem gets destroyed, simply reorder the stem and reuse the base. No need to buy the entire cone.

**Cold & Hot Weather Performance**

- Manufactured from low density polyethylene, the Enviro-Cone provides superior cold weather performance. No cracking or breaking down to -25°F.
- No more soft and droopy cones in hot weather. The Enviro-Cone stands tall and vertical in the hottest road conditions.

**Stock # 16028-HIWB-7**

28" Tall, 7 lb. with (6" & 4") reflective collars. MUTCD Compliant

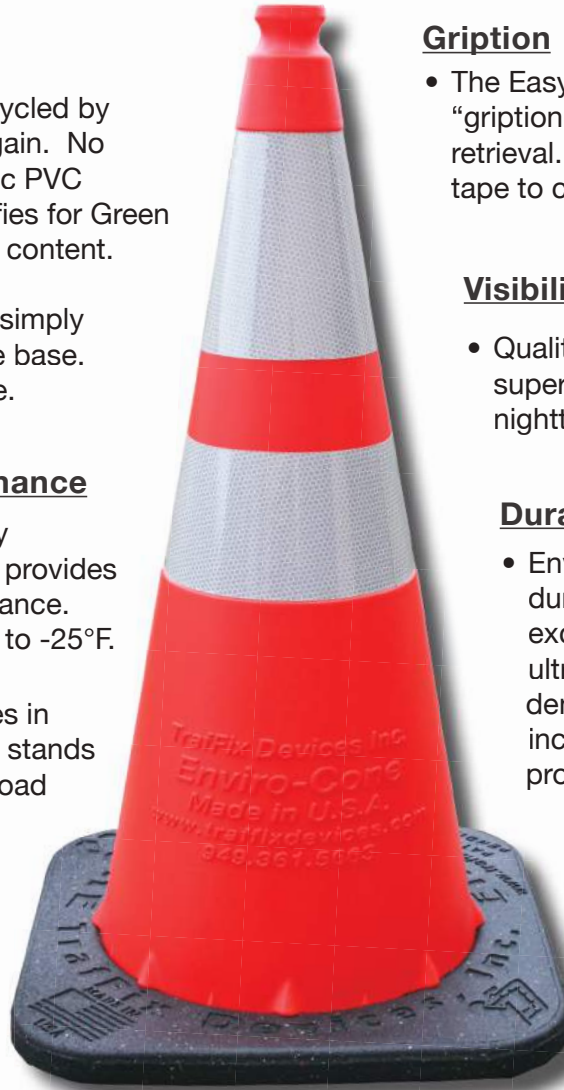

**Gription**

- The Easy Grip Groove provides excellent "gription" for quick deployment and retrieval. Also makes tying off caution tape to cone quick and easy.

**Visibility**

- Quality 3M reflective collars assure superior performance in low light and nighttime conditions.

**Durability**

- Enviro-Cone provides long term durability. Color retention is excellent through the use of ultraviolet stabilizers and low density polyethylene (LDPE) increases the life of the product.

**Stability**

- With nearly 80% of the weight in the base, the Enviro-Cone is more stable than traditional 7 or 10 lb. PVC cones.

**Complete Enviro-Cone Family**

- Available in 18, 28 and 36 inches, sheeted or unsheeted. Base weights of 3, 7, 10 or 12 lbs. All sizes available in lime.



[www.traffixdevices.com](http://www.traffixdevices.com)

# ENVIRO-CONE™



Tire impact



No ripped or torn PVC, simply reshape




Drop base over stem and reuse

## Enviro-Cone™ Specification


Orange traffic cone shall be 28" in height and have a total weight of 7 lbs. +/- .25 lbs. Stem of the cone shall be molded from LDPE to provide superior cold/hot weather performance, excellent 100% UV resistance/color retention, and superior impact performance. Base of the cone shall be molded from recycled rubber and make up approximately 80% of the total weight. Dimensions of the base are to be 15 3/4"x15 3/4". Cone base shall be removable so that the stem can be replaced. Base will lock onto the stem with molded-in locking lugs on the stem. The stem of the cone shall have recesses for reflective collars and a groove near the top of the cone for easy gription. Tipping angle of the cone shall be no less than 76° from vertical . The stem and base of the traffic cone shall be made in the USA.

### Stability Improvement Tipping Point Comparison PVC Cones vs. Enviro-Cone

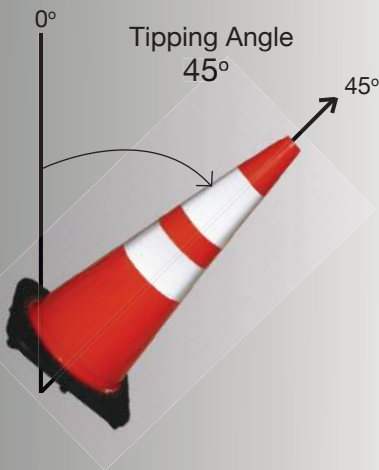


10 lb. PVC

60 % of weight in base  
40% of weight in stem

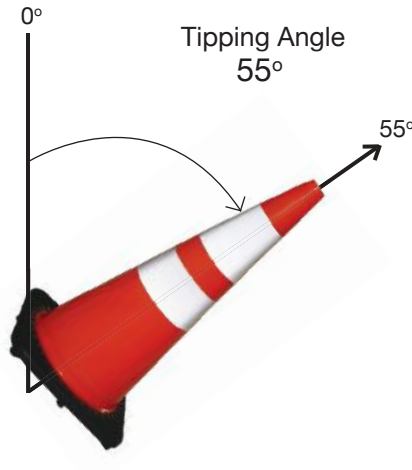

7 lb. PVC

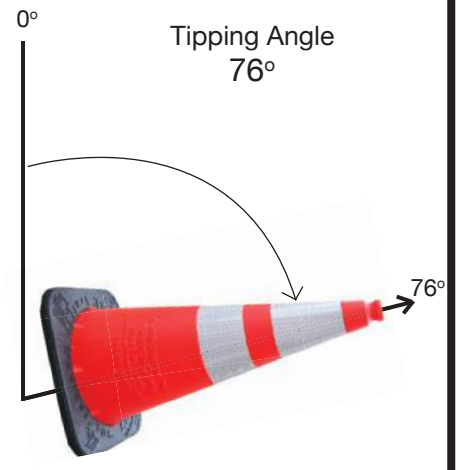

7 lb. Enviro-Cone

80 % of weight in base  
20% of weight in stem

**TraFFix  
Devices Inc.**



Distributed by:

160 Avenida La Pata, San Clemente, CA 92673  
(949) 361-5663 FAX (949) 361-9205  
www.traffixdevices.com